











PUNCH - TJ_ EJECTOR PUNCH

TYPE TJ_

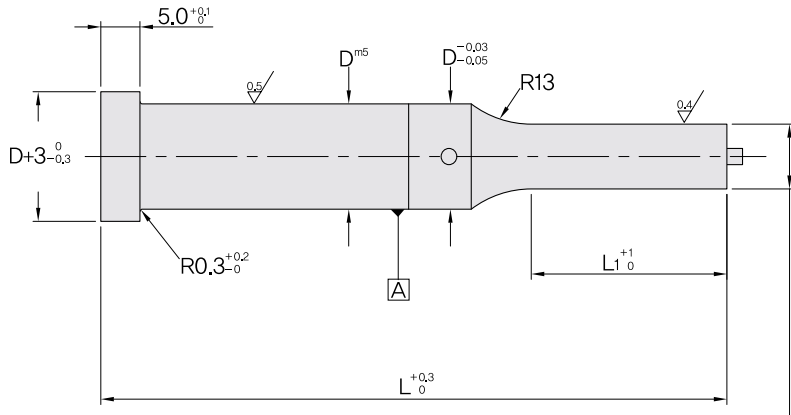

원형 $P^{+0.01}_{-0}$
 이형 $W_{\pm 0.01}$



* $P \geq W$
 * R = 지정가능
 * $G = \sqrt{P^2 + W^2}$



PUNCH – TJ_ EJECTOR PUNCH

호칭경 D	L1		Type&D	원형	Type&D	이형 min. - max. W P/G	L									
	Std.	Alt.	TJX	P	TJ_		40	50	56	60	63	70	71	80	90	100
5	13	19	TJX05	1.60-4.99	TJ_05	1.60-5.00	●	●	●	●	●	●	●	●	●	
6	13	19	TJX06	2.40-5.99	TJ_06	2.40-6.00	●	●	●	●	●	●	●	●	●	●
8	19	25	TJX08	3.20-7.99	TJ_08	3.20-8.00		●	●	●	●	●	●	●	●	●
10	19	25	TJX10	4.50-9.99	TJ_10	4.50-10.00		●	●	●	●	●	●	●	●	●
13	19	25	TJX13	6.00-12.99	TJ_13	6.00-13.00		●	●	●	●	●	●	●	●	●
16	19	25	TJX16	8.00-15.99	TJ_16	7.20-16.00		●	●	●	●	●	●	●	●	●
20	19	25	TJX20	10.00-19.99	TJ_20	8.00-20.00			●	●	●	●	●	●	●	●
25	19	25	TJX25	12.00-24.99	TJ_25	9.00-25.00			●	●	●	●	●	●	●	●
32	25	30	TJX32	16.00-31.99	TJ_32	10.00-32.00					●	●	●	●	●	●

규격표기 방법 Catalog No. D - L1 - L - P,W

 TJX 16 - 19 - 80 - P8.0

 TJR 16 - 25 - 80 - P8.5, W8.0